

Overview

MPSR Series manual pull stations from GE are noncoded fire alarm stations solidly constructed of die-cast material. All components are pre-painted or have plated surfaces to inhibit corrosion. MPSR Series manual pull stations are weatherproof and rated for outdoor use.

Single- and double-action MPSR models are available with either single pole (normally open) or double pole (double throw) alarm contacts. Depending on the model, access to the unit for resetting purposes is gained with either a keylock or hex screw. All models feature terminals for wire connection.

Standard Features

- Solid corrosion-resistant construction
- Rated for outdoor use
- Surface mount weatherproof backbox and gasket included
- Positive snap-action activation
- Single and double action models
- Single or double pole contacts
- Terminals for wire connections
- Key lock or hex screw reset

Application

MPSR Series manual stations have 10 amp snap action switches and gold contacts. They may be used with or without a break glass rod. Rod replacement requires no special tools. Each manual station may be reset and locked using the standard key or hex key provided.

Weatherproof Manual Stations

MPSR Series



U.S.
T 888-378-2329
F 866-503-3996

Canada
T 519 376 2430
F 519 376 7258

Asia
T 852 2907 8108
F 852 2142 5063

Australia
T 61 3 9259 4700
F 61 3 9259 4799

Europe
T 32 2 725 11 20
F 32 2 721 86 13

Latin America
T 305 593 4301
F 305 593 4300

www.gesecurity.com/est

© 2007 General Electric Company
All Rights Reserved

Specifications

Dimensions

Width	3.325 in (8.445 cm)
Height	4.750 in (12.065 cm)
Depth	Single Action: 0.875 in (2.22 cm) Double Action: 1.5 in (3.8 cm) Backbox: 2.25 in (5.72 cm)

Electrical

Wiring	Two or six contact terminal block depending on model
Switch	10 amp @ 120 Vac


Physical

Mounting	Single gang weatherproof backbox (included)
Lock	Standard key or hex key
Operation	Single action or double action depending on model

Operating environment


Temperature	-30 °F to 150 °F (-35 °C to 66 °C)
Humidity	0 to 85% RH, noncondensing

Assembly

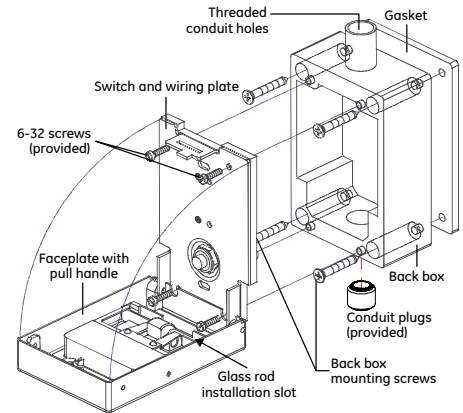


Wiring

Two contact terminal block wiring



Six contact terminal block wiring

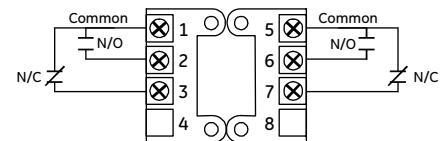

Ordering Information

Model	Description	Ship Wt. lb (kg)
-------	-------------	---------------------

Single Action Stations (weatherproof backbox included)

MPSR1-SHTW-GE	SPST, hex screw reset, terminal connections.	1.24 (0.56)
MPSR1-S45W-GE	SPST, Cat 45 Key reset, terminal connections.	1.24 (0.56)
MPSR1-DHTW-GE	DPDT, hex screw reset, terminal connections.	1.24 (0.56)
MPSR1-D45W-GE	DPDT, Cat 45 Key reset, terminal connections.	1.24 (0.56)

Double Action Stations (weatherproof backbox included)

MPSR2-SHTW-GE	SPST, hex screw reset, terminal connections.	1.24 (0.56)
MPSR2-DHTW-GE	DPDT, hex screw reset, terminal connections.	1.24 (0.56)
MPSR2-S45W-GE	SPST, Cat 45 Key reset, terminal connections.	1.24 (0.56)
MPSR2-D45W-GE	DPDT, Cat 45 Key reset, terminal connections.	1.24 (0.56)
MPSR2-SHTW-GE-NYW	SPST, hex screw reset, terminal connections, NYC white stripe.	1.24 (0.56)
MPSR2-S45W-GE-NYW	SPST, Cat 45 Key reset, terminal connections, NYC white stripe.	1.24 (0.56)

For bilingual French/English markings add **-B** to the suffix of the model number.

Accessories

MPRGR10	Replacement glass rods for MPSR stations (10 pack).
276-K1	Cat 45 Key (each)